


Smoke extraction
damper / shutter -multi

SEDM-D



El 120 (v_{ed} - i ↔ o)S1500C₃₀₀AAmulti

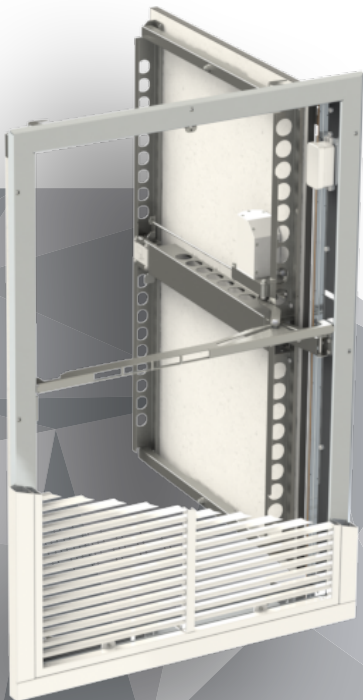

- WIDE VARIETY OF GRILLS
- ZERO POWER CONSUMPTION IN STAND-BY POSITION
- EASY INSTALLATION AND QUICK ACCESS BOTH CAN BE DONE FROM HALLWAY
- DYNAMIC SIZING OF DIMENSIONS (INCREMENT 5 MM) AND LARGE EFFECTIVE AREA
- UNLIMITED VARIETY OF RAL COLOR VARIANTS AND INNER PART ALSO AVAILABLE IN DARK COLOR
- DESIGNED TO MAXIMIZE SMOKE EXTRACTION IN:

MULTI-STORY CAR PARK
APARTMENT BUILDINGS
SKYSCRAPERS
HOTELS

NF 61.937-1
NF 61.937-10

CE EN 12101 - 8



TPM 155/22

mandik.com/sedm-d

MANDIK®

CE certification according to
EN 12101-8

Tested according to
EN 1366-10


Classified according to
13501-4 + A1

Pressure class 3
(underpressure 1500 Pa / overpressure 500 Pa)

Closed blade tightness class 3 according to
EN 1751

In accordance with
NF 61.937-1 and NF 61.937-10

SPARE PARTS AVAILABLE

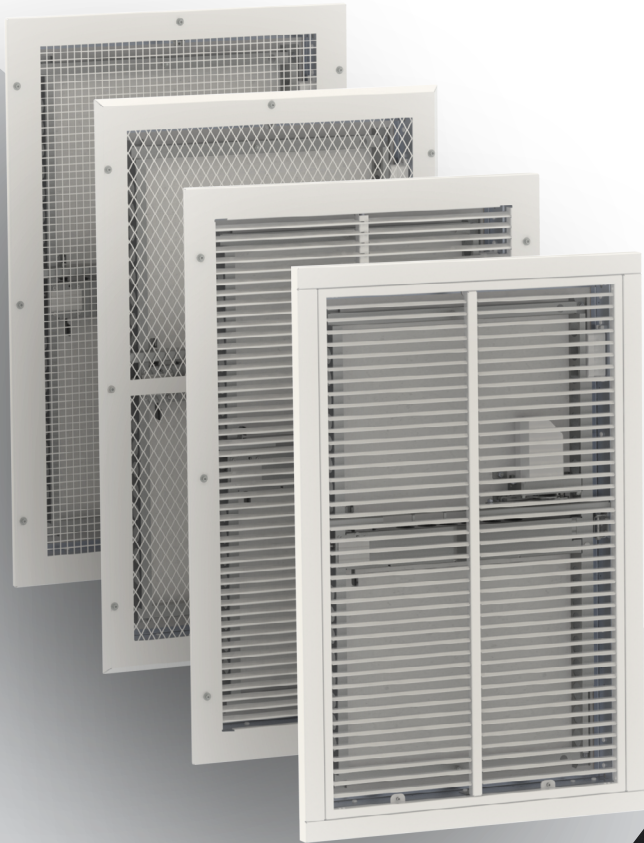

ACTIVATION:

Remote activation using a permanent magnet with electric coil

REARMING:

- hand - operated design
- from 300 x 300 mm up to 700 x 1100 mm by 5 mm -
- rearming motor design
- from 350 x 385 mm up to 700 x 1100 mm by 5 mm -

INSTALLATION:

Installation into vertical shaft (duct) from wide variety of materials with or without installation frame

GRILLES

Grilles of 77% to 95% effective cross section available. Available in any RAL color variant

DEPTH

Total depth of 90 mm (built-in depth 80mm) without grille

